

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8


| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|----------------|---------------|---------|---------------|
| A | NEW RELEASE | JLZ 07/29/14' | | LJC 07/29/14' |
| D | DRAWING UPDATE | JLZ 07/01/19' | | |
| | | | | |

B
QA 1
QC 1
QF 1

C
SD 1
R&D 1
PD 1
ISO 1
IE 1
ED 1
DC 1


NOTES:

- Insulation material: PVC.
Color: Grey Or Black.
- SPECIFICATION
 - Rating: 300V
 - Conductor Size: 28~22AWG.
 - Insulation resistance: 100MΩ/km Min.
 - Contact resistance: 150Ω/km Max.
- Product Number Code
DS1057-04 - X X X X X X X - X

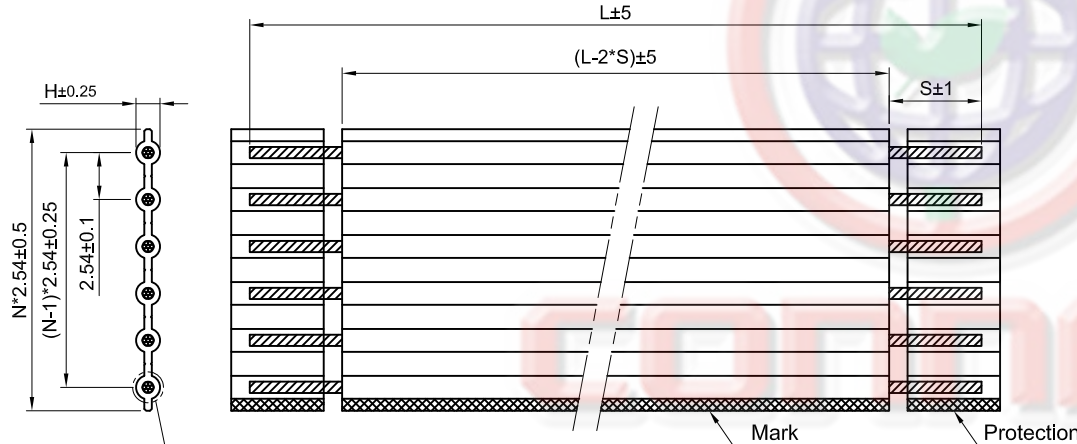

N=No.Of positions

| Cable Size | Dimensions | |
|------------|------------------|--|
| | Thickness(Dim.H) | |
| 22 | 1.51 | |
| 24 | 1.37 | |
| 26 | 1.04 | |
| 28 | 0.90 | |

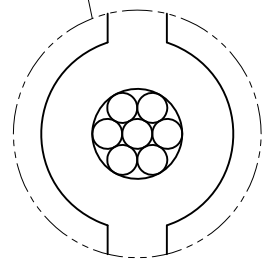

Stranded Type
DETAIL
(SCALE 8:1)

Protection Support
 N/A Code: W/O Protection
 S: W/ Protection
 Wire Stripping Length(DIM S)
 00:0mm(For 100M/R)
 05:5mm
 06:6mm
 Edge Mark
 X:W/O Mark
 R:Red Mark
 Length DIM L
 080:80mm

 100M:100meter/reel
 Wire Type
 B: Stranded Type
 Wire AWG
 28 26 24 22
 Cable color
 A: Gray
 B: Black
 No.Of positions
 02~30

| | | | | | | | | |
|-------------------|-------|-------------------------|-----|--------------|----|----------|------------------------------|--|
| GENERAL TOLERANCE | | ANGLE TOLERANCE | | PROJECTION | | TITLE | 2.54mm pitch 2651 FLAT CABLE | |
| X. | ±0.60 | X. | ±5° | UNITS | mm | SHEET | A4 | |
| .X | ±0.38 | .X | ±3° | SHEET SIZE | A4 | SERIES | DS1057-04 SERIES | |
| .XX | ±0.25 | .XX | ±2° | DRAWING TYPE | | CUSTOMER | | |
| SCALE | | 1:1 | | SHEET | | 1 OF 1 | | |
| DRAWING NO. | | C-DS1057-04-XXXXXXX-X-D | | | | | | |

晨翔电子有限公司
CONNFLY CONNELY ELECTRONIC CO. LTD

1 2 3 4 5 6 7 8