
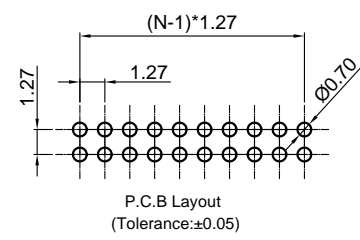
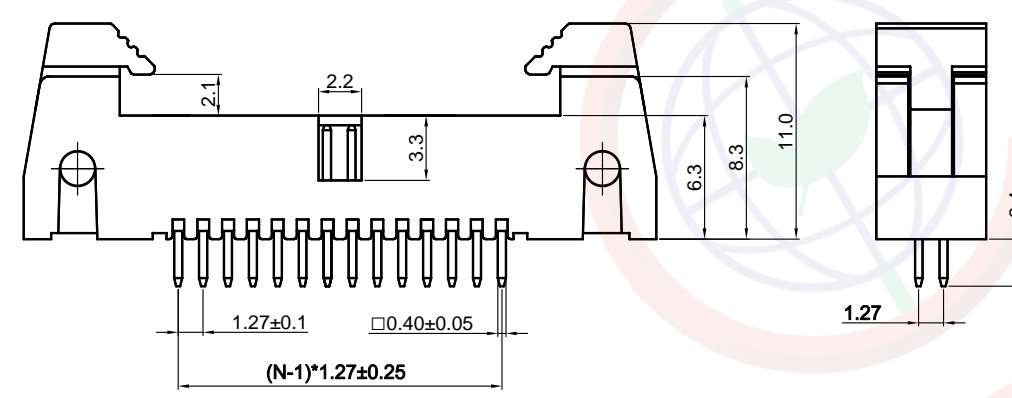


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY reserves the right to make changes to this drawing without notice and to discontinue or modify the product at any time without notice. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 01/05/18'		LJC 01/05/18'
B	DRAWING UPDATE	JLZ 08/24/18'		

Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

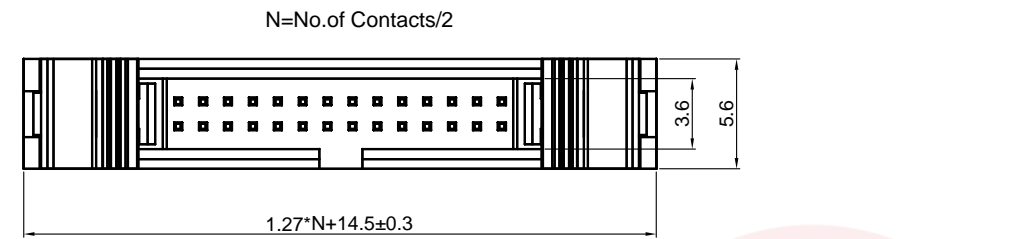

(Series Image-Reference Only)

- NOTES:**
- Materials
 - Contact: copper alloy
 - Insulation: Thermoplastic(UL94 V-0)
 - Specification
 - Temperature:-40°C~+105°C
 - Contact Resistance:30mΩ max.(initial)
 - Insulation Resistance:1,000MΩ min
 - Dielectric Withstanding Voltage:AC 250V Per Minute
 - Product number code:

DS1011-09	-	X	X	X	X	X
		Housing Color	Contact Plating	Ejector Type	Mounting Type	No. of Contacts
		B: Black	8: Full Gold Flash	S: Short Latch	V: V/T	10 14 16 20 24 26 30 34 40 44 50 60 64

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	SHROUDED HEADER PITCH 1.27*1.27mm	
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1011-09 SERIES	
.X	±0.38	.X	±3°	SHEET SIZE	A4			
.XX	±0.25	.XX	±2°					
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNELY ELECTRONIC CO. LTD				
SCALE		1:1						
DRAWING NO.		C-DS1011-09-XXXXX-B						