


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

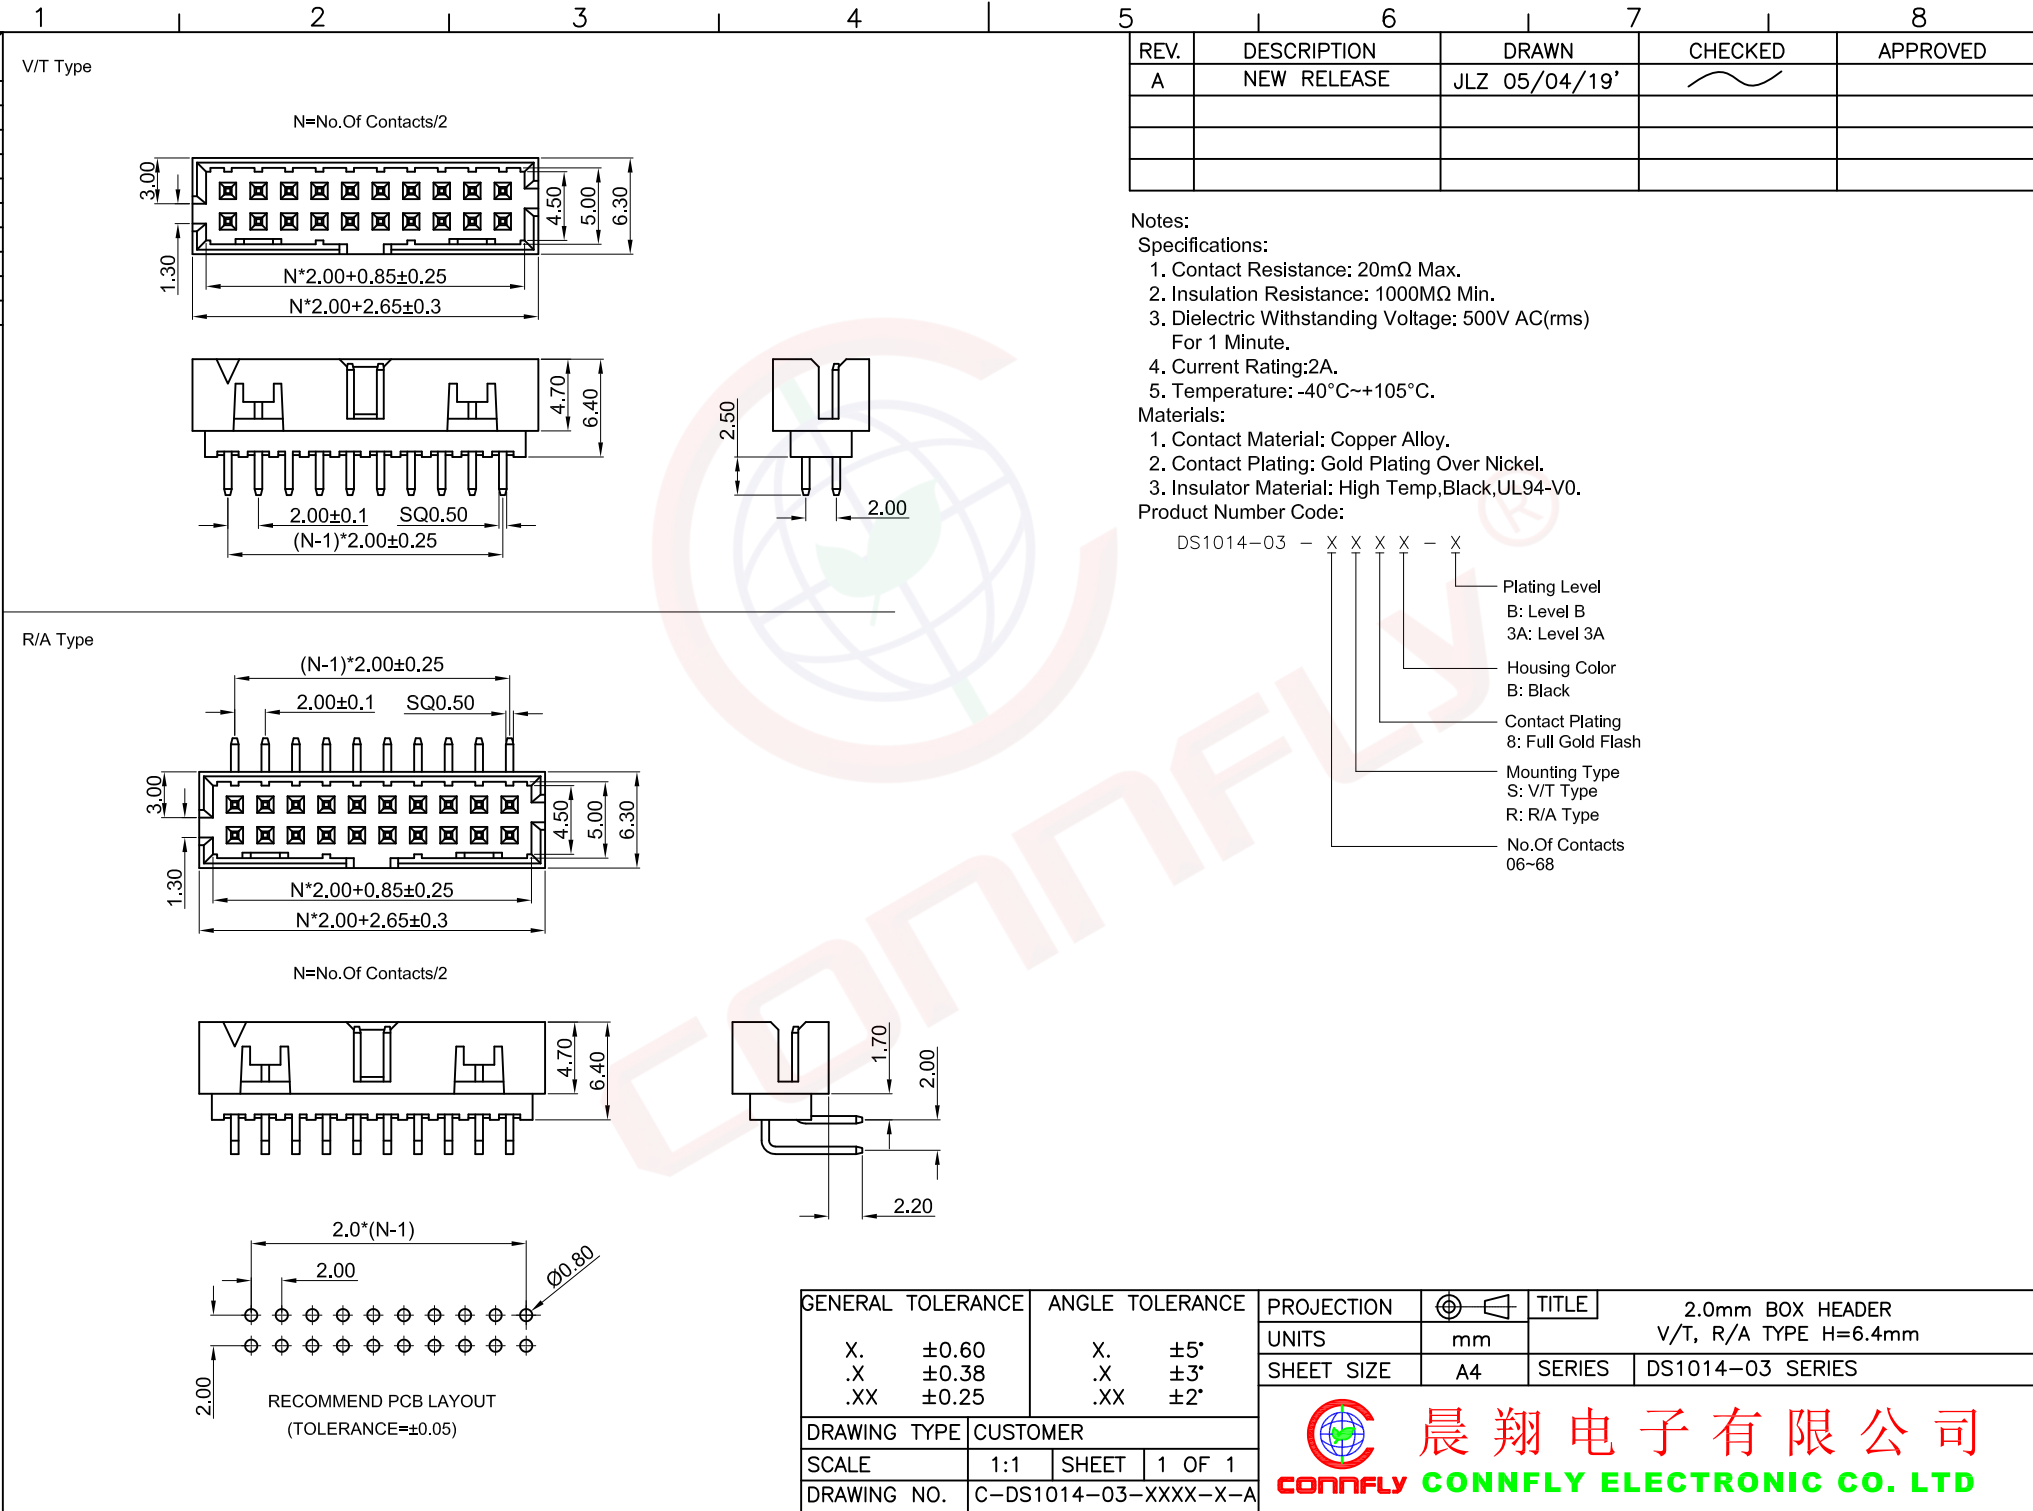

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/04/19'		

Notes:
Specifications:
 1. Contact Resistance: 20mΩ Max.
 2. Insulation Resistance: 1000MΩ Min.
 3. Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
 4. Current Rating:2A.
 5. Temperature: -40°C~+105°C.
Materials:
 1. Contact Material: Copper Alloy.
 2. Contact Plating: Gold Plating Over Nickel.
 3. Insulator Material: High Temp,Black,UL94-V0.

Product Number Code:
 DS1014-03 - X X X X - X

- Plating Level
- B: Level B
- 3A: Level 3A
- Housing Color
- B: Black
- Contact Plating
- 8: Full Gold Flash
- Mounting Type
- S: V/T Type
- R: R/A Type
- No.Of Contacts
- 06-68

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	C-DS1014-03-XXXX-X-A





PROJECTION	TITLE
	2.0mm BOX HEADER
UNITS	V/T, R/A TYPE H=6.4mm
SHEET SIZE	A4
SERIES	DS1014-03 SERIES

晨翔电子有限公司
CONNELY CONNELY ELECTRONIC CO. LTD

Dept	1	2	3	4	5	6	7	8
Qty								
DC	1							
ED	1							
IE	1							
ISO	1							
PD	1							
R&D	1							
SD	1							
QA	1							
QC	1							
QE	1							

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

N:NUMBER OF CONTACTS/2

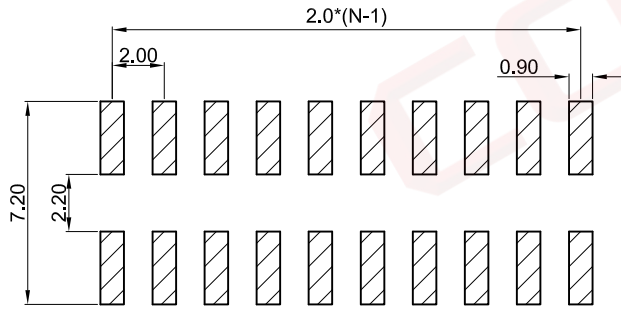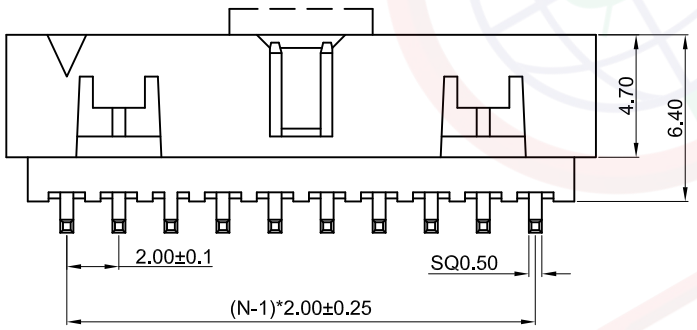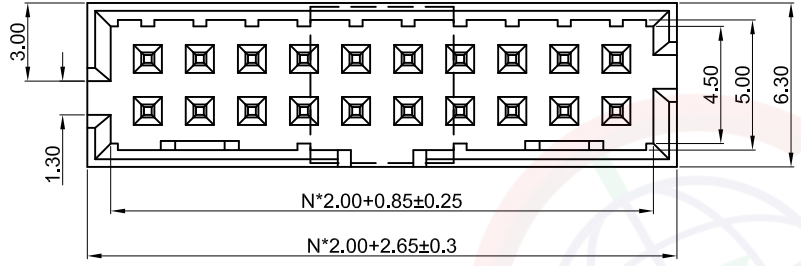

Notes:

Specifications:

- Contact Resistance: 20mΩ Max.
- Insulation Resistance: 1000MΩ Min.
- Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
- Current Rating:2A.
- Temperature: -40°C~+105°C.

Materials:

- Contact Material: Copper Alloy.
- Contact Plating: Gold Plating Over Nickel.
- Insulator Material: High Temp,Black,UL94-V0.

Product Number Code:

DS1014-03 - X X X X X X - X

- Plating Level
- 3A: Level 3A
- B: Level B
- Post Support
- S:W/ Post
- X:W/O Post
- Packing Type
- T:Tray
- R:Tape On Reel
- B:Tube
- Pick Up Support
- S:W/ Pick Up
- X:W/O Pick Up
- Housing Color
- B: Black
- Contact Plating
- 8: Full Gold Flash
- Mounting Type
- M: SMT Type
- No.Of Contacts
- 06~68

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET 1 OF 1
DRAWING NO.		C-DS1014-03-XXXXXX-X-A	

PROJECTION		TITLE	2.0mm BOX HEADER
UNITS	mm		SMT TYPE H=6.4mm
SHEET SIZE	A4	SERIES	DS1014-03 SERIES

晨翔电子有限公司
CONNFLY CONNELY ELECTRONIC CO. LTD