

Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNPLY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNPLY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/05/19'		
B	DRAWING UPDATE	JLZ 04/01/22'		

C





D

E

F

G

H

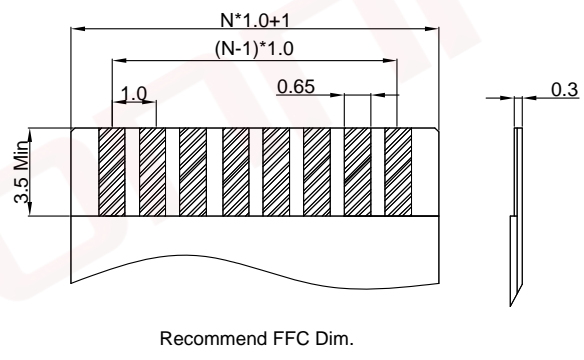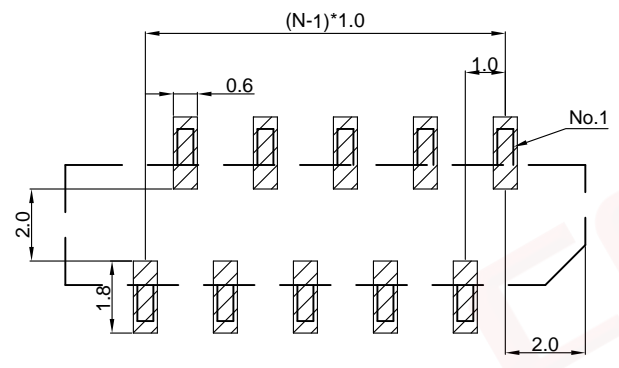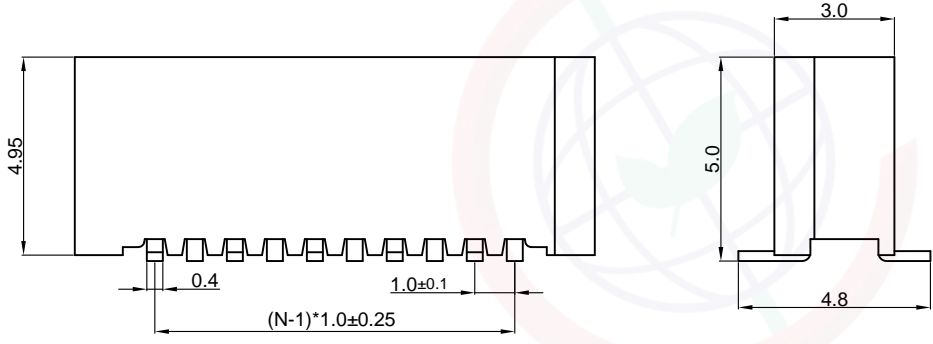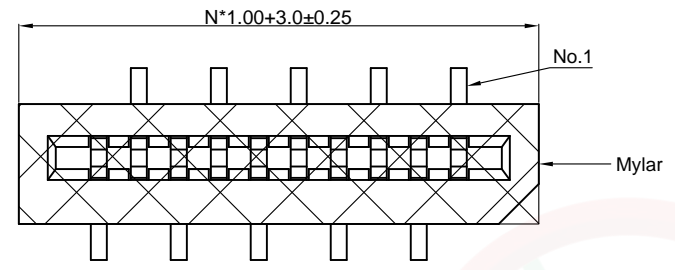


NOTES:

- Material
 - 1.1 Insulator:Thermoplastic(UL 94V-0).
 - 1.2 Contact: Copper alloy.
- Specification
 - 2.1 Temperature:-25°C ~ +85°C.
 - 2.2 Contact resistance:30mΩ max.
 - 2.3 Insulation resistance:100MΩ min.
 - 2.4 Dielectric withstanding voltage:AC 100V per minute.
 - 2.5 Current rating: 0.5A AC/DC
 - 2.6 Voltage rating: 50V AC/DC
- Product number code:

DS1020-25- X X X X X

 - Packing type
B: Tube(W/O Mylar)
R: Tape on reel(W/ Mylar)
 - Pick up support
M: W/ Mylar
X: W/O Mylar
 - Contact plating
T1: Tin
8: Full gold flash
 - Housing color
B:Black
V:Ivory
 - No. of contacts
04~40

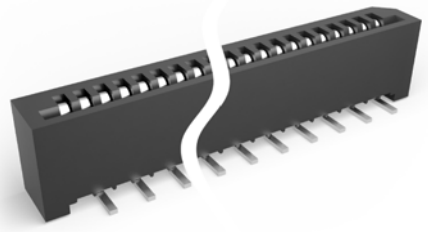

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	1.00mm FPC Upright SMT	
X.	±0.60	X.	±5°	UNITS	mm	Type H=4.95mm		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1020-25 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNPLY CONNPLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE		1:1						
DRAWING NO.		C-DS1020-25-XXXXX-B						