






The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

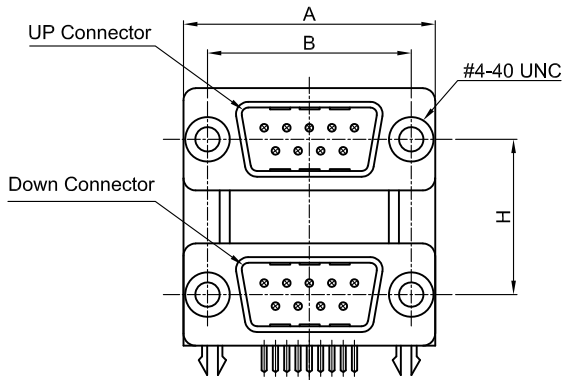

Positions	DIM A	DIM B
9	30.80	24.99
15	39.14	33.32
25	53.04	47.04

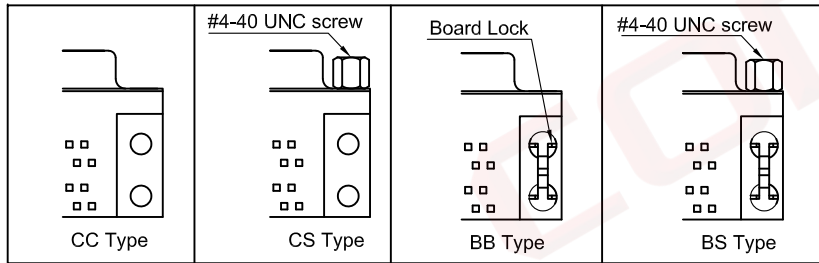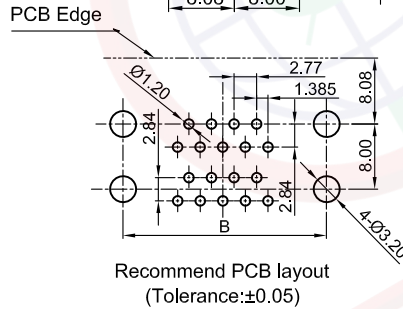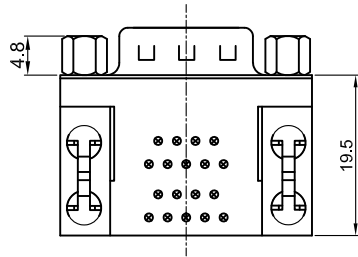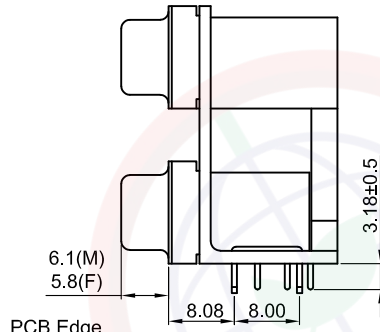

(Series Image-Reference Only)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 12/20/06'		
B	DRAWING UPDATE	JLZ 11/28/22'		
C	DRAWING UPDATE	JLZ 11/16/24'		

Notes:

Specifications:

- Contact Resistance: 100mΩ Max.
- Insulation Resistance: 1000MΩ Min.
- Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
- Current Rating:3A.
- Temperature: -40°C~+105°C.

Materials:

- Contact Material: Copper Alloy.
- Shell Material: Steel.
- Insulator Material: PBT,Black,UL94-V0.
- Board Lock: Copper alloy.

Product Number Code:

DS1082-01 - X X X X X X

- Screw type
  - 1: CC type 2: CS type
  - 3: BB type 4: BS type
- Central distance(DIM. H)
  - 1: 19.05mm 2: 15.88mm
- Housing color
  - B: Black
- Contact plating
  - 0: Selective gold flash
  - 8: Full gold flash
- Up connector type
  - 9M: D-SUB Standard 9pin Male
  - 9F: D-SUB Standard 9pin Female
  - 15M: D-SUB Standard 15pin Male
  - 15F: D-SUB Standard 15pin Female
  - 25M: D-SUB Standard 25pin Male
  - 25F: D-SUB Standard 25pin Female
- Down connector type
  - 9M: D-SUB Standard 9pin Male
  - 9F: D-SUB Standard 9pin Female
  - 15M: D-SUB Standard 15pin Male
  - 15F: D-SUB Standard 15pin Female
  - 25M: D-SUB Standard 25pin Male
  - 25F: D-SUB Standard 25pin Female

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1082-01-XXXXXX-C		

PROJECTION		TITLE	D-SUB Dual Port Type	
UNITS	mm	SERIES	DS1082-01 SERIES	

**晨翔电子有限公司**  
**CONNFLY CONNELY ELECTRONIC CO. LTD**

1 2 3 4 5 6 7 8