


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 04/30/15'		LJC 04/30/15'
B	DRAWING UPDATE	JLZ 09/29/18'		

The information provided herein is from CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNFLY or its affiliates. Unauthorized use of the information herein, including but not limited to, reproduction, distribution, or disclosure, is strictly prohibited. CONNFLY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

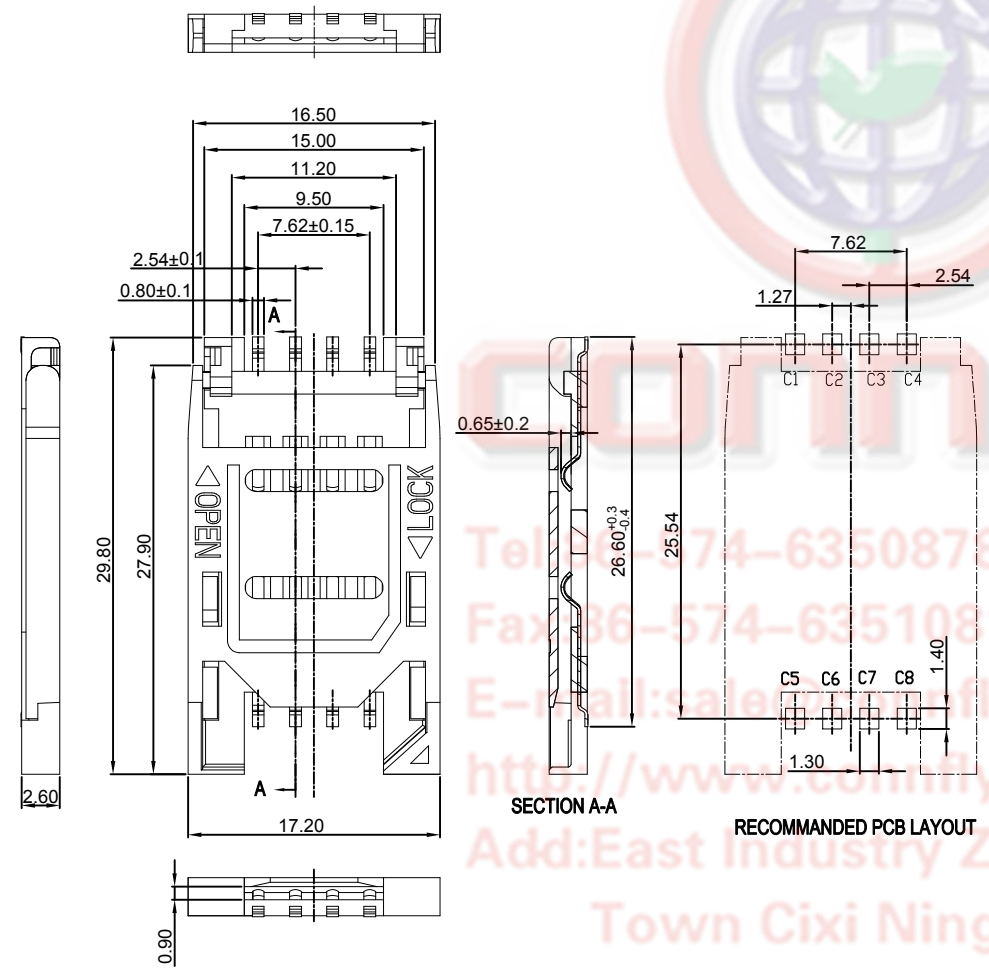

Notes:

- Material:
 - Housing: High Temperature LCP UL 94V-0 Color: Black.
 - Contacts: Copper Alloy. Selective Gold Flash.
- Specifications:
 - Operate Temperature: -40° C~+85° C
 - Insulation Resistance: 1000MΩ Min.
 - Contact Resistance: 50mΩ max.
 - Withstanding Voltage: 500V AC 1min.
 - Voltage Rating: 30V AC/DC
 - Current Rating: 0.5A
- Product Number Code:

DS1138-09 - XX X X X X X X

 - Packing Type: R: Tape On Reel, B: Tube
 - Post Support: X: W/O Post
 - Housing color: B: Black
 - Contact Plating: 0: Selective 1u" gold
 - Mounting type: S: SMT type
 - Connector type: S: Socket
 - No. of contacts: 08:8pin

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.54mm SIM Card H=2.6mm 8 Positions SMT Type W/O Post	
X.	±0.60	X.	±5°	UNITS	mm	SHEET	8	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1138-09 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE		1:1						
DRAWING NO.		C-DS1138-09-XXXXXXX-B						