


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights of CONNPLY Electronic Co., Ltd. are strictly protected. Any use or reproduction of this drawing without the prior written consent from CONNPLY is strictly prohibited. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNPLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 01/09/24'		

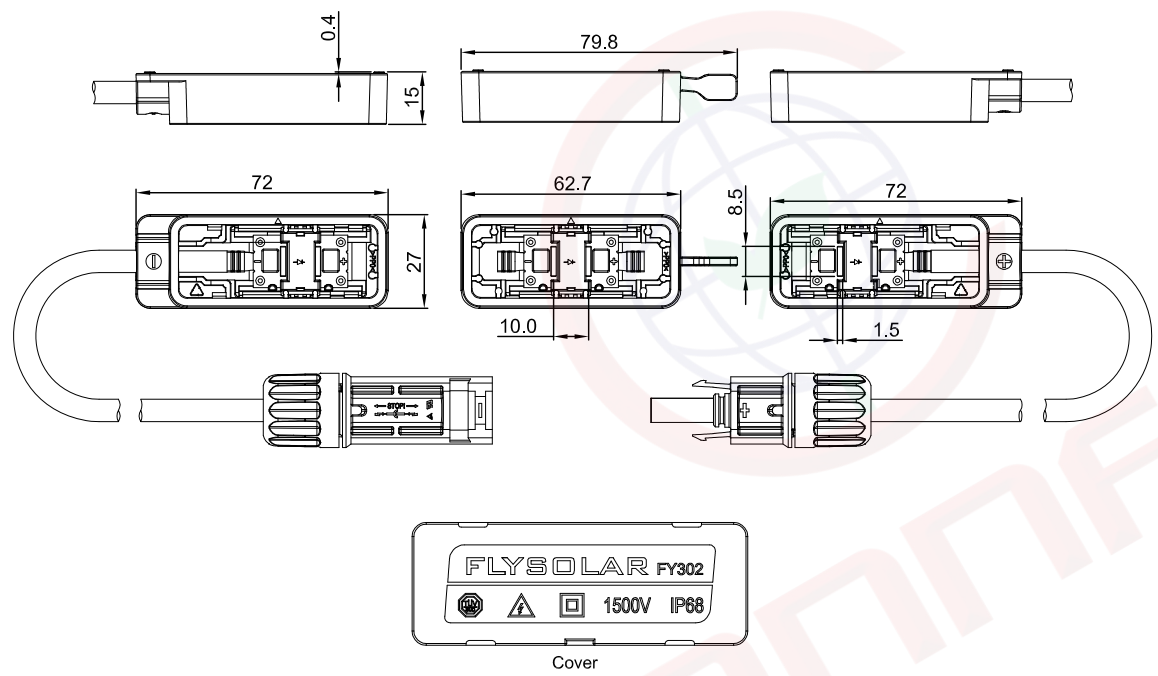

(Series Image-Reference Only)

Notes:

Specifications:

- Current Rating:20A-35A
- Voltage Rating:1500V DC
- Max Working Voltage:100V
- Safety Class:Class II
- Pollution Degree: I (Potted)
- Flame Class:UL94-5VA
- Protection Degree:IP68
- Glue Volume:3*7.0mL
- Temperature: -40°C~+85°C.

Materials:

- Insulating material:Thermoplastic Black.
- Contact material: Copper, Tin plated.
- Cable:XLPE+Copper , Tin plated.

Product Number Code:

DS1162-36 - X X X X X

- Current Rating
20: 20A 25: 25A
30: 30A 35: 35A
- Cable color
B: Black
- Contact plating
6: Tin
- Housing color
B: Black
- No. of contacts
1T: 1 Set

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PV Junction Box	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1162-36 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNPLY CONNPLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1162-36-XXXXX-A						