



The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays in exercising such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/25/16'		LJC 05/25/16'
B	DRAWING UPDATE	JLZ 07/21/18'		

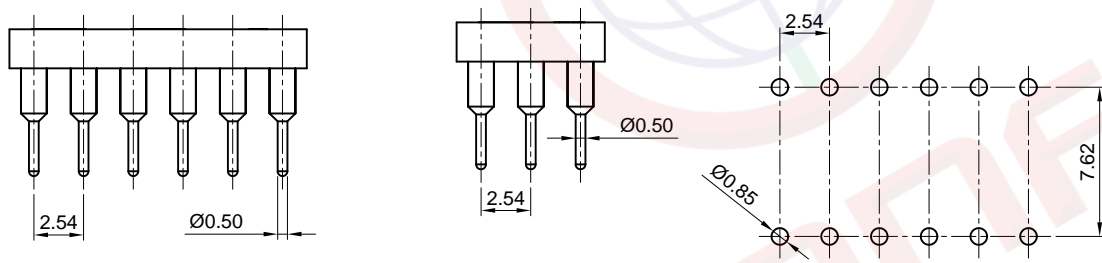

Recommend PCB layout
Tolerance=±0.05

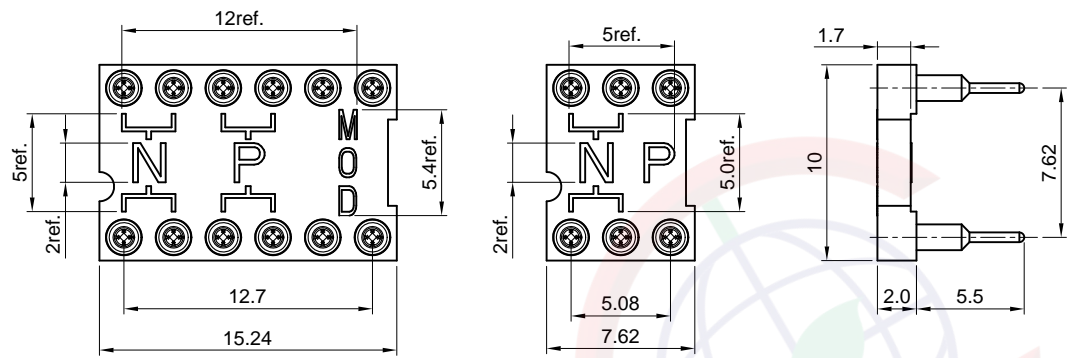

(Series Image)

NOTES:

- Performance:
 - Contact resistance: 30mΩ Max.
 - Dielectric withstanding voltage: 500V AC/60s.
 - Insulation resistance: 1000MΩ Min.
 - Current rating: 1A.
 - Voltage rating: 30V AC/DC.
 - Temperature range: -40~+105°C.
- Materials:
 - Contact material: Copper alloy.
 - Insulator material: PBT,Black,UL94-V0.
- Product number code:

DS1001-05 - X X X X X X X

- Central support
- X: W/O Central support
- Clip plating
- F6: Full 3u" gold
- 8: Full gold flash
- Housing material
- S: PBT
- Width
- N: 7.62mm
- Pin plating
- T1: Full tin
- 8: Full gold flash
- Clip type
- B: 4 Fingers
- No.of contacts
- 06 12

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1001-05-XXXXX-B		

PROJECTION	TITLE
	DIP IC SOCKET PITCH 2.54mm
UNITS	PROFILE HEIGHT=2.0mm
SHEET SIZE	A4
SERIES	DS1001-05 SERIES

晨翔电子有限公司
CONNFLY ELECTRONIC CO. LTD