



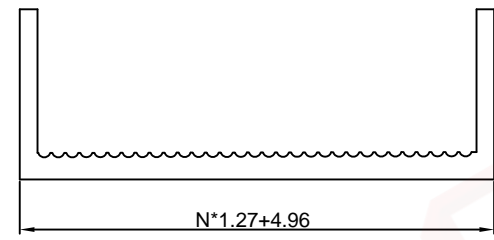
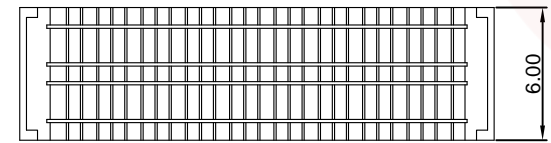
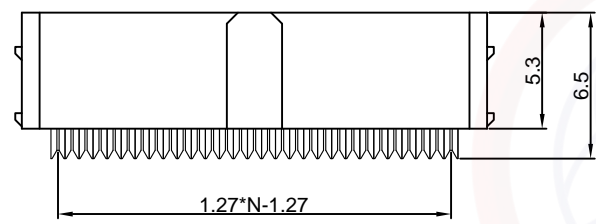


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this drawing without the prior written permission of CONNELY is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

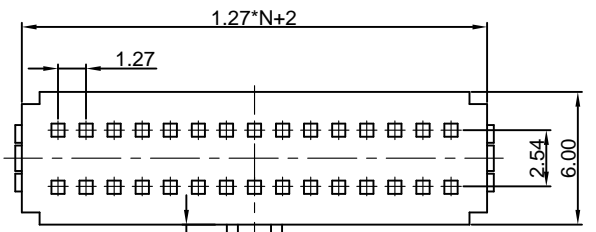

(Series Image-Reference Only)

N=No. of contacts/2

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/06/08'		LJC 09/06/08'
B	DRAWING UPDATE	JLZ 08/28/18'		

NOTES:

- Electrical characteristics:
  - Contact resistance: 30mΩ Max.
  - Dielectric withstanding voltage: 500V AC(rms) for 1 minute.
  - Insulation resistance: 1000MΩ Min.
- Environment characteristics:
  - Temperature range: -40°C~+105°C.
- Product number code:  
 DS1016-01- X X X X
  - Housing color  
A:Gray  
B:Black
  - Contact plating  
2:Nickel + Gold flash  
8:Full gold flash
  - Polarization support  
A:W/  
B:W/O
  - No. of contacts  
06 08 10 16 20 26 30 34  
40 50 60 64 68 80 100

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1016-01-XXXX-B		

PROJECTION		TITLE	INDICATOR
UNITS	mm	IDC SOCKET PITCH 1.27*2.54mm	
SHEET SIZE	A4	SERIES	DS1016-01 SERIES

晨翔电子有限公司  
CONNFLY CONNELY ELECTRONIC CO., LTD