
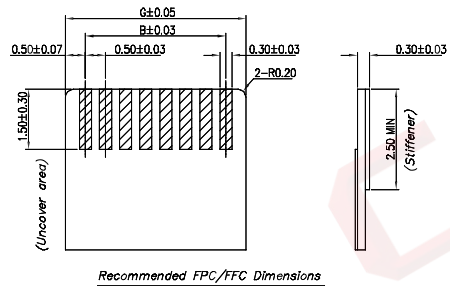
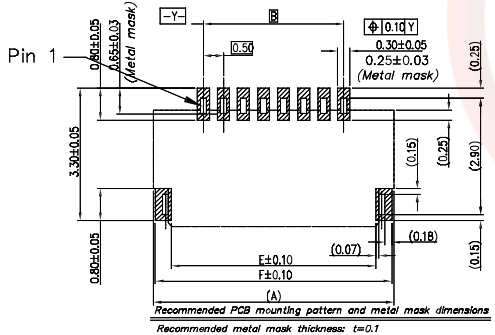
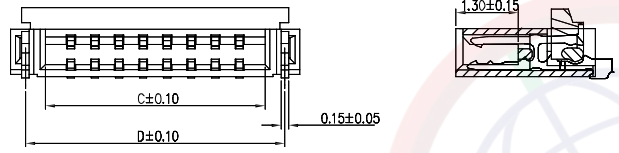


Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

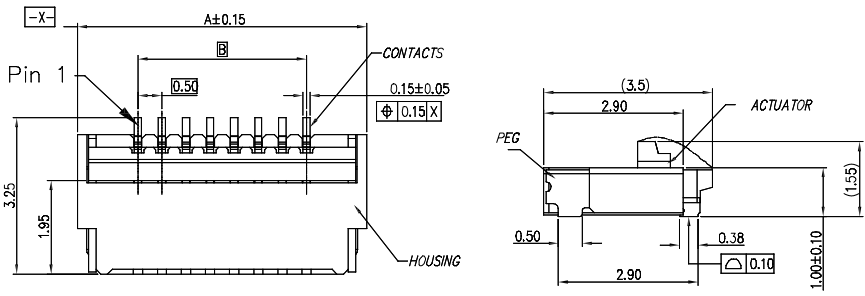


(Series Image-Reference Only)

	50	45	40	34	32	30	26	24	23	22	20	16	14	12	11	10	8	7	6	4
27.00	24.50	22.00	19.00	18.00	17.00	16.00	15.00	14.00	13.50	13.00	12.00	10.00	9.00	8.00	7.50	7.00	6.00	5.50	5.00	4.00
24.50	22.00	19.50	16.50	15.50	14.50	13.50	12.50	11.50	11.00	10.50	9.50	7.50	6.50	5.50	5.00	4.50	3.50	3.00	2.50	1.50
22.00	19.50	20.57	17.57	16.57	15.57	14.39	13.39	12.57	12.07	11.57	10.57	8.57	7.57	6.57	6.07	5.57	4.57	4.07	3.57	2.57
19.00	16.50	20.57	18.39	17.39	16.39	15.39	14.39	13.39	12.89	12.39	11.39	9.39	8.39	7.39	6.89	6.39	5.39	4.89	4.39	3.39
18.00	15.50	21.39	18.10	17.10	16.10	15.10	14.10	13.10	12.60	12.10	11.10	9.10	8.10	7.10	6.60	6.10	5.10	4.60	4.10	3.10
17.00	14.50	21.90	18.90	17.90	16.90	15.90	14.90	13.90	13.40	12.90	11.90	9.90	8.90	7.90	7.40	6.90	5.90	5.40	4.90	3.90
15.00	13.50	23.00	20.50	19.50	18.50	17.50	16.50	15.50	15.00	14.50	13.50	11.50	10.50	9.50	9.00	8.50	7.50	7.00	6.50	5.50
14.00	11.50	23.89	21.39	20.39	19.39	18.39	17.39	16.39	15.89	15.39	14.39	12.39	11.39	10.39	9.89	9.39	8.39	7.89	7.39	6.39
13.00	10.50	24.40	21.90	20.90	19.90	18.90	17.90	16.90	16.40	15.90	14.90	12.90	11.90	10.90	10.40	9.90	8.90	8.40	7.90	6.90
12.00	9.50	25.57	23.39	22.39	21.39	20.39	19.39	18.39	17.89	17.39	16.39	14.39	13.39	12.39	11.89	11.39	10.39	9.89	9.39	8.39
11.00	8.50	26.10	23.60	22.60	21.60	20.60	19.60	18.60	18.10	17.60	16.60	14.60	13.60	12.60	12.10	11.60	10.60	10.10	9.60	8.60
10.00	7.50	26.90	24.40	23.40	22.40	21.40	20.40	19.40	18.90	18.40	17.40	15.40	14.40	13.40	12.90	12.40	11.40	10.90	10.40	9.40
9.00	6.50	27.00	25.00	24.00	23.00	22.00	21.00	20.00	19.50	19.00	18.00	16.00	15.00	14.00	13.50	13.00	12.00	11.50	11.00	10.00
8.00	5.50	27.00	25.50	24.50	23.50	22.50	21.50	20.50	20.00	19.50	18.50	16.50	15.50	14.50	14.00	13.50	12.50	12.00	11.50	10.50
7.00	4.50	27.00	26.00	25.00	24.00	23.00	22.00	21.00	20.50	20.00	19.00	17.00	16.00	15.00	14.50	14.00	13.00	12.50	12.00	11.00
6.00	3.50	27.00	26.50	25.50	24.50	23.50	22.50	21.50	21.00	20.50	19.50	17.50	16.50	15.50	15.00	14.50	13.50	13.00	12.50	11.50
5.00	2.50	27.00	27.00	26.00	25.00	24.00	23.00	22.00	21.50	21.00	20.00	18.00	17.00	16.00	15.50	15.00	14.00	13.50	13.00	12.00
4.00	1.50	27.00	27.50	26.50	25.50	24.50	23.50	22.50	22.00	21.50	20.50	18.50	17.50	16.50	16.00	15.50	14.50	14.00	13.50	12.50
Contacts	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G													

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 10/11/16'		LJC 10/11/16'
B	DRAWING UPDATE	JLZ 06/13/20'		

- NOTES:
- Materials
 - 1.1 Insulator: Thermoplastic (UL 94V-0).
 - 1.2 Contact: Copper alloy.
 - Specification
 - 2.1 Temperature: -25°C ~ +85°C.
 - 2.2 Contact resistance: 30mΩ max.
 - 2.3 Insulation resistance: 100MΩ min.
 - 2.4 Dielectric withstanding voltage: AC 100V per minute.
 - Product number code:

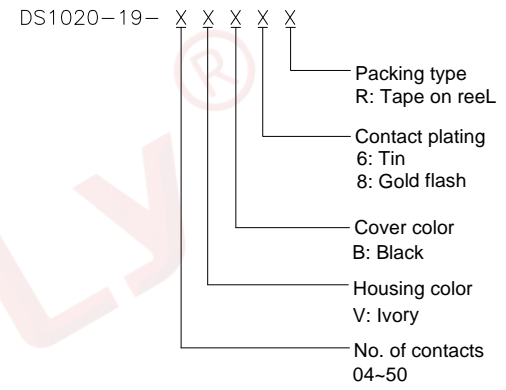

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER
SCALE	1:1
DRAWING NO.	C-DS1020-19-XXXXX-B

PROJECTION	TITLE
	0.5mm FPC
UNITS	SHEET
mm	1 OF 1
SHEET SIZE	SERIES
A4	DS1020-19 SERIES

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD