


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY reserves the right to make changes to this document without notice and to exercise such rights as it deems necessary. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

H

A  
B  
C  
D  
E  
F  
G

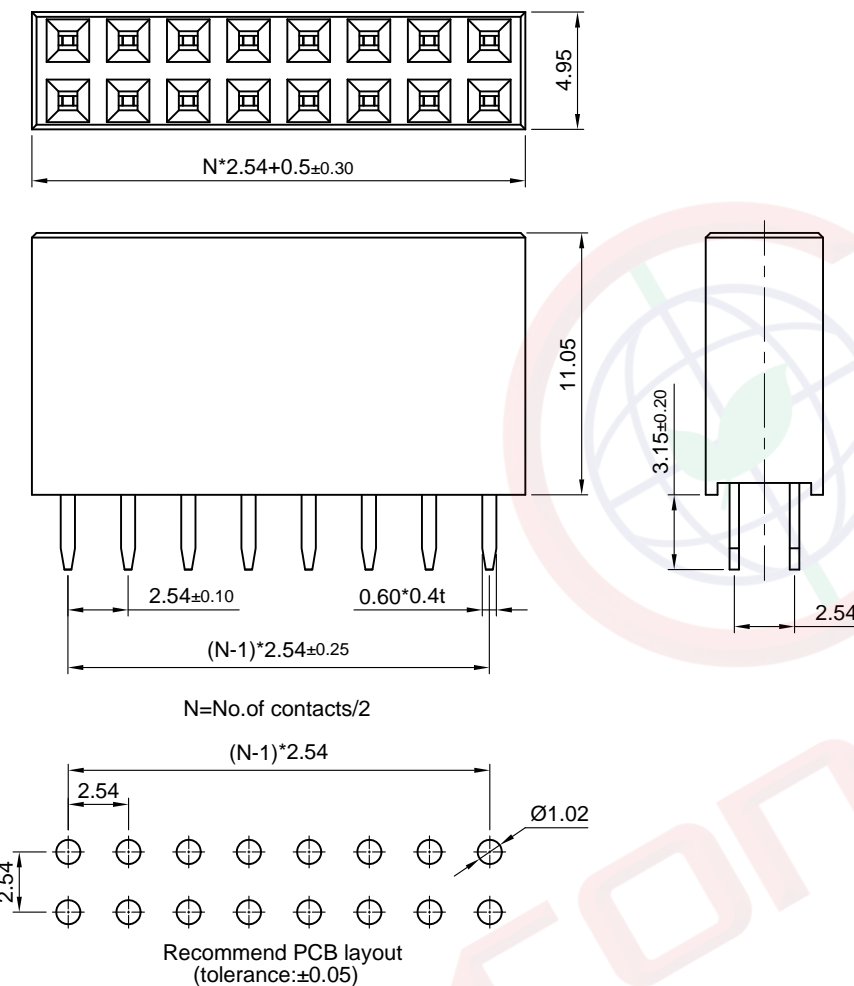

(Series Image-Reference Only)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 11/1/11'		LJC 11/1/11'
B	DRAWING UPDATE	JLZ 01/09/19'		

Notes:  
Specifications:  
1. Contact Resistance: 20mΩ Max.  
2. Insulation Resistance: 1000MΩ Min.  
3. Dielectric Withstanding Voltage: 600V AC(rms) For 1 Minute.  
4. Current Rating:3A.  
5. Temperature: -40°C~+105°C.  
Materials:  
1. Contact Material: Copper Alloy.  
2. Contact Plating: Gold Plating Over Nickel.  
3. Insulator Material: High Temp,Black,UL94-V0.  
Product Number Code:

DS1023-22 - X X X

- Contact plating  
2: Nickel + Gold flash  
8: Full gold flash
- Mounting type  
V: V/T type
- No.of contacts  
2x2-2x40

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		TITLE	FEMALE HEADER PITCH	
X. $\pm 0.60$	X. $\pm 5^\circ$	UNITS	mm		2.54mm V/T TYPE H=11.05mm	
.X $\pm 0.38$	.X $\pm 3^\circ$	SHEET SIZE	A4	SERIES	DS1023-22 SERIES	
.XX $\pm 0.25$	.XX $\pm 2^\circ$	晨翔电子有限公司 <b>CONNELY CONNELY ELECTRONIC CO. LTD</b>				
DRAWING TYPE	CUSTOMER					
SCALE	1:1					SHEET
DRAWING NO.	C-DS1023-22-XXX-B					