



The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of the information herein is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1                      2                      3                      4                      5                      6                      7                      8



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 08/20/18'		

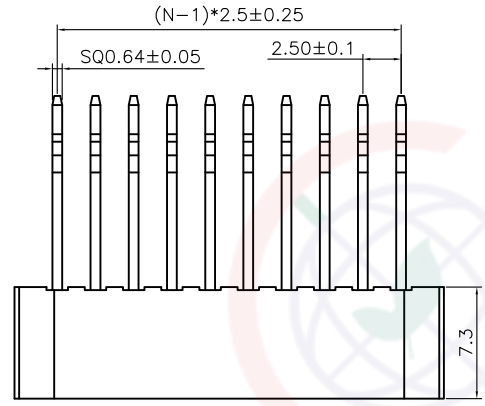


NOTES:

- MAIN SPECIFICATIONS
  - Housing material: HIGH TEMP.
  - Contact material: Brass
  - Rated voltage: 250V
  - Rated current: 3A
  - Contact resistance: 30mΩ Max
  - Insulation resistance: 1000MΩ Min
  - Withstanding voltage: 1000V AC 1 minute
  - Temperature range: -25 ~ +85°C

N=No.of contacts/2

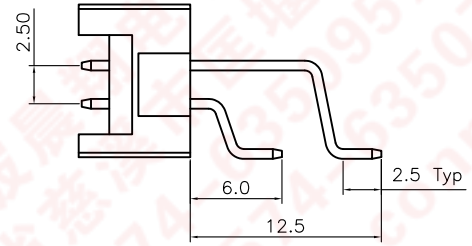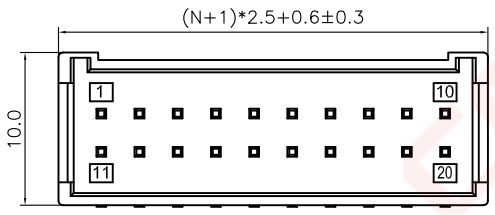

2. Product Number Code:
- DS1069-14 - X X X X X X
- Packing type: B: Tube, R: Tape on reel
  - Housing color: W: White
  - Contact plating: 8: Full gold flash
  - Mounting type: S: SMT type
  - Connector type: M: Male
  - No.of contacts: 2x4~2x20

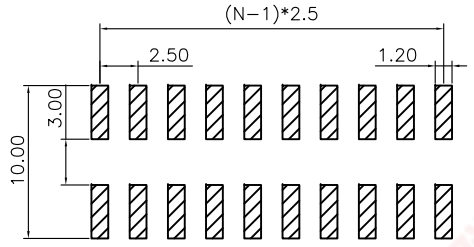

Recommend PCB Layout

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.60	X. ±5°
.X ±0.38	.X ±3°
.XX ±0.25	.XX ±2°

PROJECTION		TITLE	2.5mm New XH Type Double Row SMT Type	
UNITS	mm	SHEET SIZE	A4	SERIES DS1069-14 SERIES

DRAWING TYPE	CUSTOMER			
SCALE	1:1	SHEET	1 OF 1	
DRAWING NO.	C-DS1069-14-XXXXXX-A			

**晨翔电子有限公司**  
**CONNFLY CONNELY ELECTRONIC CO. LTD**

1                      2                      3                      4                      5                      6                      7                      8