




REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 11/15/06		

NOTES:

- SPECIFICATION:
  - Current Rating: 3A.
  - Insulation Resistance: 1000MΩ min.
  - Dielectric Withstanding: 500V for One minute.
  - Contact resistance: 100mΩ max.
  - Operating Temperature: -40°C to +105°C
- MATERIALS
  - Insulator: PBT With 30% Glass Fiber(UL 94V-0)
  - Contact: Copper alloy.
  - Shell: Stell.
  - Board Lock: Copper alloy
- PRODUCT NUMBER CODE:

DS1082 - X X X X X

- Contact Plating
- 6: Tin
- 0: Selective Gold flash
- Shell plating
- N: nickel
- Color of 25pin housing
- P: Purple
- B: BLACK
- L: BLUE
- Color of 15pin housing
- B: BLACK
- L: BLUE
- Color of 9pin housing
- B: BLACK
- L: BLUE

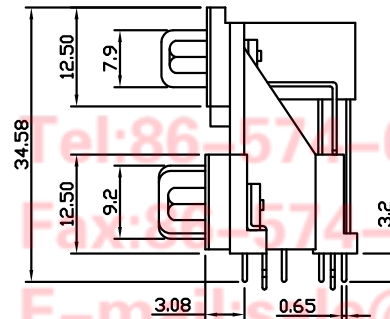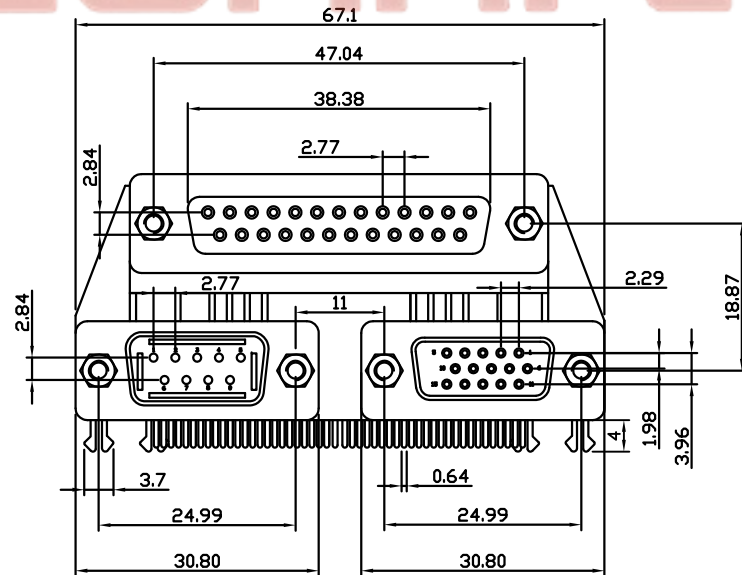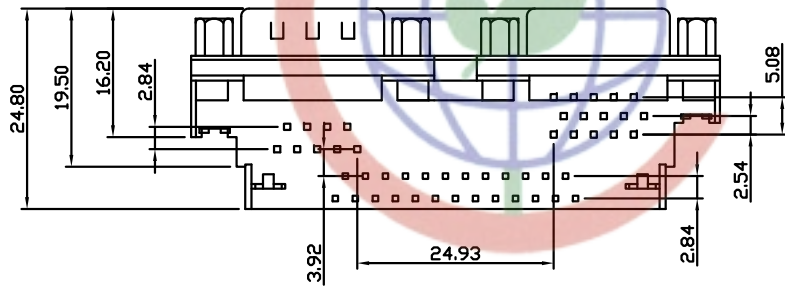

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	D-SUB CONNECTORS 3 in 1
X.	±0.60	X.	±5°	UNITS	mm		(25F/9M/15F)
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1082
.XX	±0.25	.XX	±2°	晨翔电子有限公司 <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>			
DRAWING TYPE		CUSTOMER					
SCALE		1:1 SHEET 1 OF 1					
DRAWING NO.		C-DS1082-XXXXX					