


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 20/06/05		

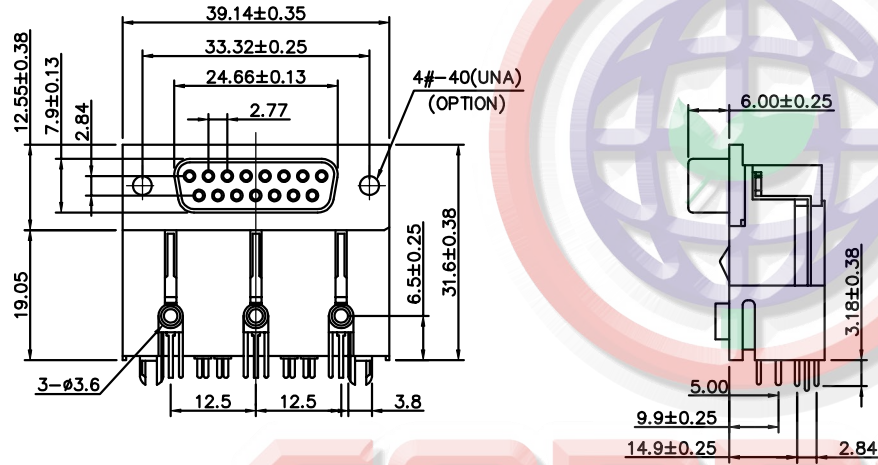



NOTES:

- SPECIFICATIONS
 - Contact Resistance: 100mΩ max
 - Insulation Resistance: 1000MΩ min.
 - Current Rating: 3A
 - Dielectric withstanding voltage: AC 500V For 1 minute
 - Contact: Copper alloy.
 - Insulator: PBT.

2. PRODUCT NUMBER CODE:

DS1083 - X X X

- D-SUB Housing COLOR
 - B: Black
 - Y: Yellow
 - L: Blue
- Screw type
 - A: #4-40UNC Screw type
 - B: #4-40UNC Rivet type
 - C: #4-40UNC Rivet & Screw type
- CONTACT PLATING
 - 0: Selective gold flash
 - 8: Full GOLD FLASH

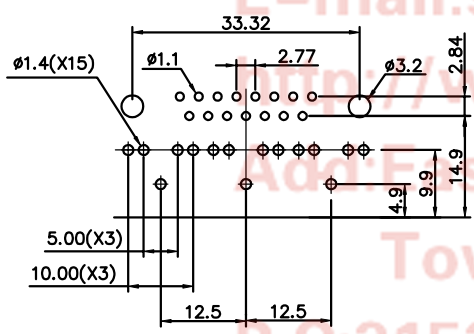

Recommend PCB Layout(Tolerance: ±0.05)

574-63508787
 Fax: 86-574-63510817
 E-mail: sale@connfly.com
<http://www.connfly.com>
 Add: East Industry Zone KuangYan
 Town Cixi Ningbo Chi
 P.C: 315233

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		SHEET 1 OF 1	
DRAWING NO.		C-DS1083-XXX	

PROJECTION	TITLE	D-SUB 15FEMALE/3PCS AUDIO JACK HIGHRAISE	
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1083


晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD