


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 04/28/17'		

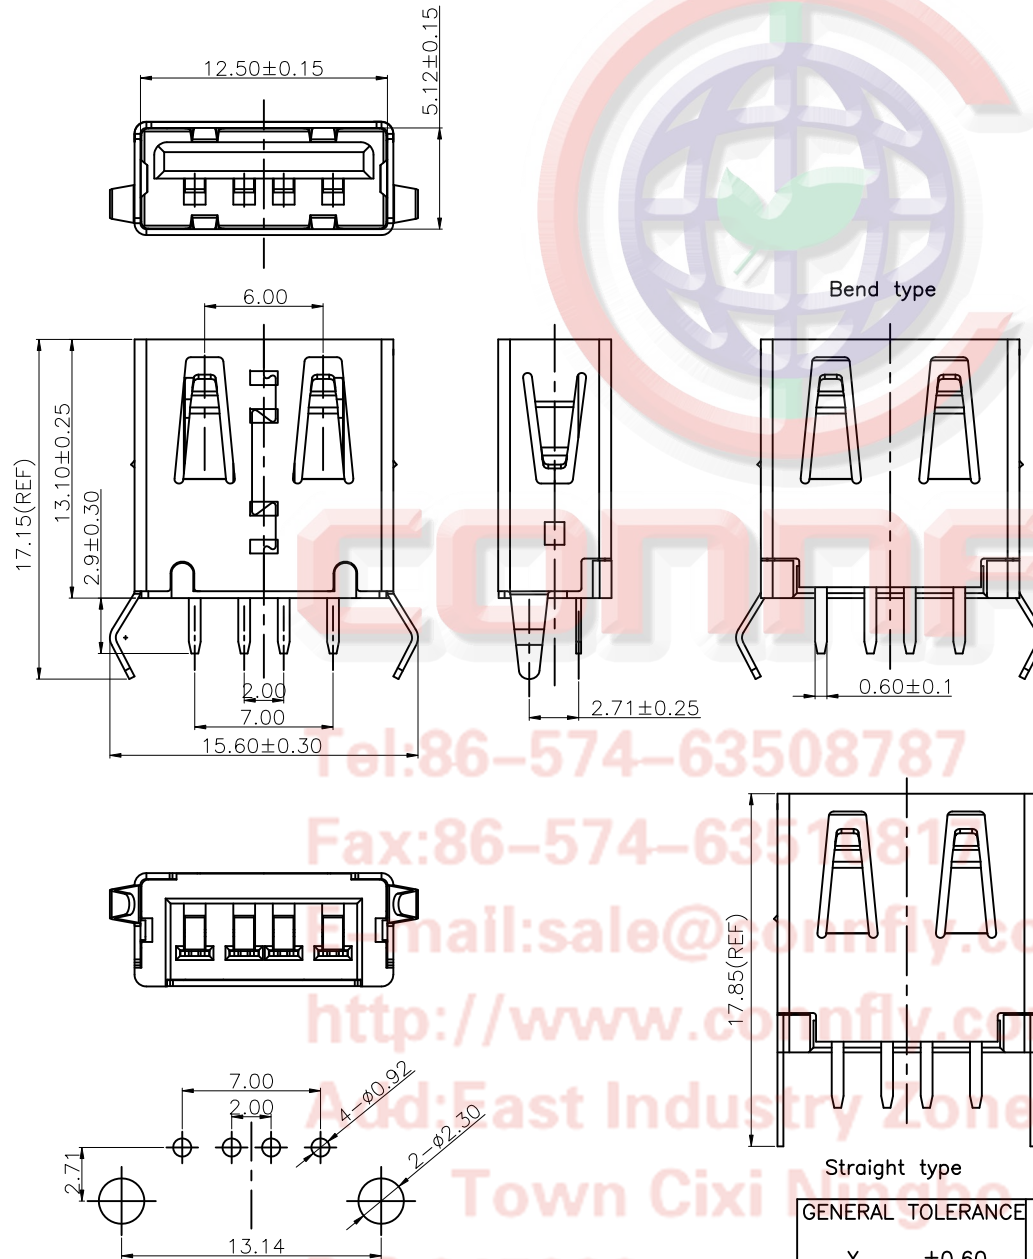

- NOTE:
- Material:
    - Housing: Thermoplastics
    - Contact: Copper Alloy
    - Shell: Copper Alloy or Steel
  - Specification:
    - 2.1: Rated current: 1.5 A
    - Insulation Resistance: 1000M $\Omega$  Min. at 500V/DC for 1Minute.
    - Withstanding voltage: 500 VAC/minute
    - Contact Resistance: 30 mohms Max.
  - PRODUCT NUMBER CODE:
    - DS1095-13 - X X X X X
    - MATERIAL OF SHELL: C: Copper Alloy, F: Steel
    - CONTACT PLATING: 0: Selective gold flash, 03: Selective gold 3u", 15: Selective gold 15u", 30: Selective gold 30u"
    - BOARDLOCK TYPE: S: Straight type, B: Bend type
    - SHELL PLATING: N: Nickel
    - COLOR OF HOUSING: W: White, B: Black

RECOMMENDED PCB LAYOUT(TOP VIEW)  
GENERAL TOLERANCES:±0.05

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1095-13-XXXX-A		

PROJECTION		TITLE	USB A Female V/T Type L=13.1mm	
UNITS	mm	SHEET	A4	
SHEET SIZE	A4	SERIES	DS1095-13 SERIES	

晨翔电子有限公司  
CONNFLY CONNFLY ELECTRONIC CO. LTD