

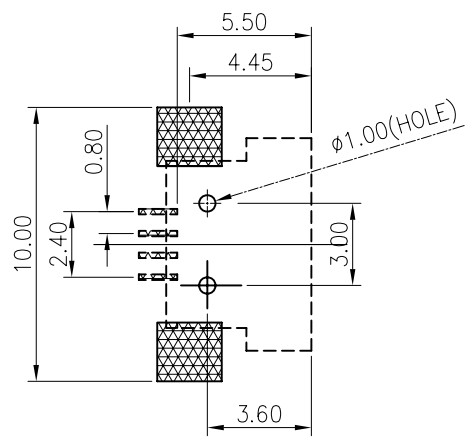
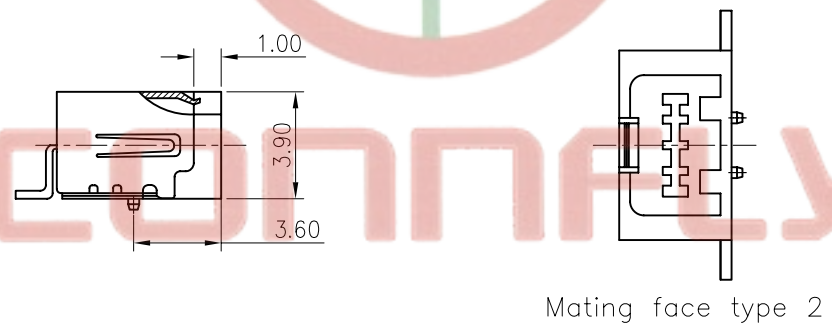


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/10/05'		

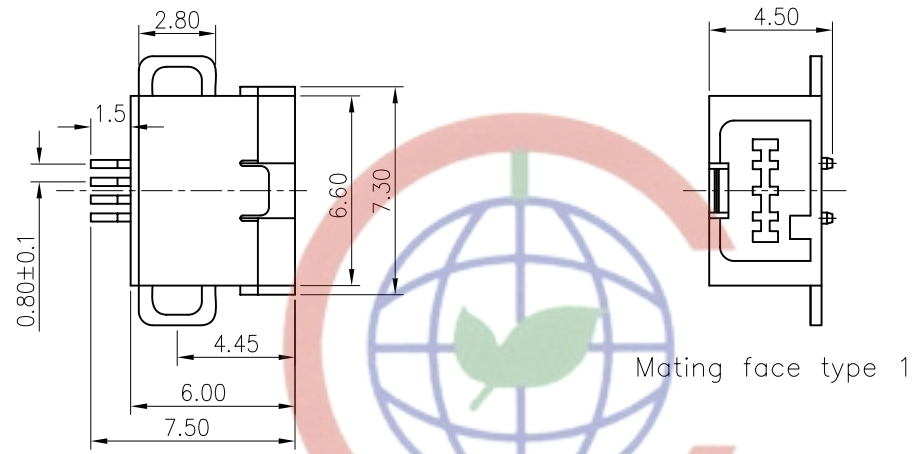

NOTES:

- SPECIFICATIONS
 - .CURRENT RATING: 0.5A/pin Max.
 - .VOLTAGE RATING: 30V(DC)
 - .DIELECTRIC WITHSTANDING VOLTAGE: 100VAC 1 minute.
 - .CONTACT RESISTANCE: 50mΩ Max.
 - .INSULATION RESISTANCE: 100MΩ Min.
 - .TEMPERATURE RANGE: -40°C--+105°C
- MATERIALS
 - .HOUSING: High temperature plastic.
 - .SHELL: Copper alloy.
 - .CONTACT: Copper alloy.
- PRODUCT NUMBER CODE:

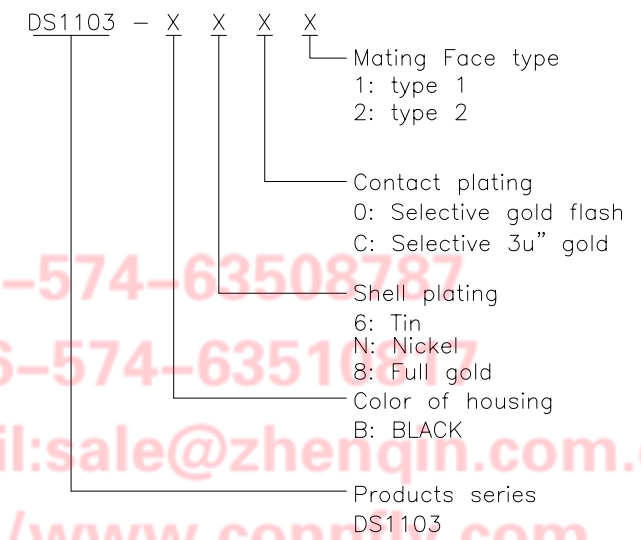

Tel:86-574-63508787
 Fax:86-574-63510177
 E-mail:sale@zhengqin.com.cn
 Http://www.connfly.com

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	MINI USB 4PIN SMT Female SINGLE TYPE			
X.	±0.60	X.	±5°	UNITS	mm	SHEET	DS1103			
.X	±0.38	.X	±3°	SHEET SIZE	A4					
.XX	±0.25	.XX	±2°							
DRAWING TYPE		CUSTOMER			晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD					
SCALE		1:1	SHEET						1 OF 1	
DRAWING NO.		C-DS1103-XXXX								