


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 06/01/11'		

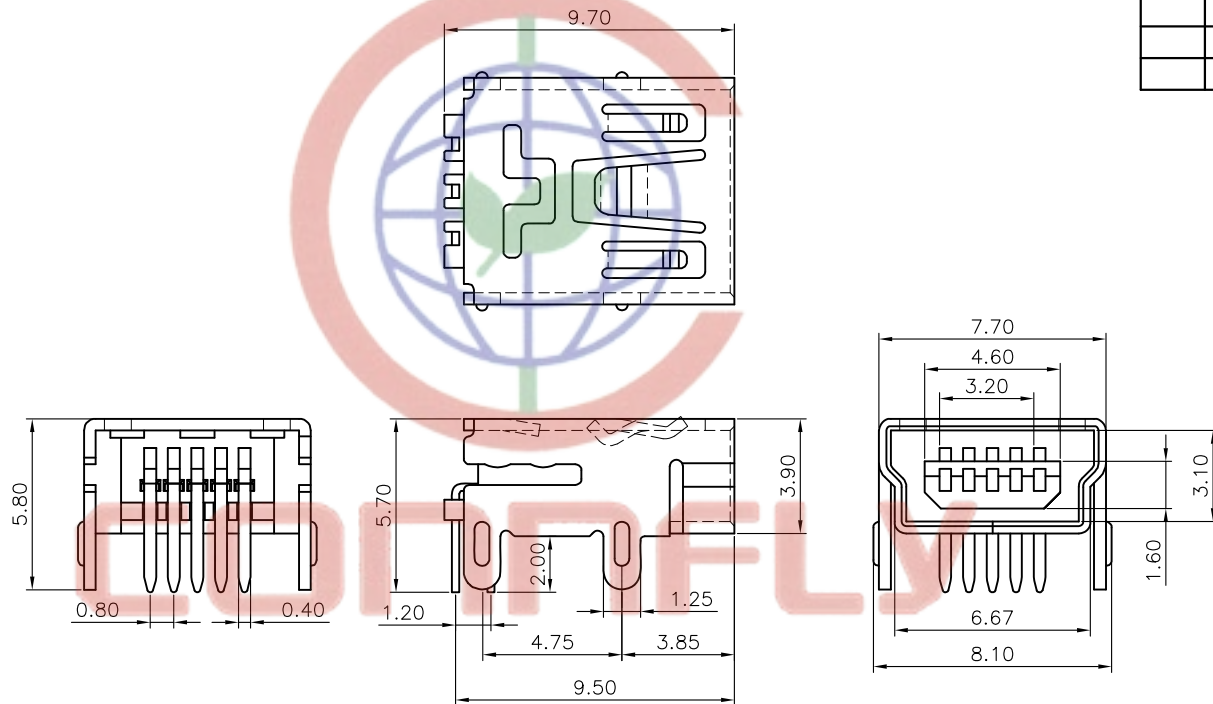

NOTES:

1.SPECIFICATIONS


- .VOLTAGE RATING: 30V(DC)
- .DIELECTRIC WITHSTANDING VOLTAGE: 100VAC 1 minute.
- .CONTACT RESISTANCE: 50mΩ Max.
- .INSULATION RESISTANCE: 100MΩ Min.
- .TEMPERATURE RANGE: -40°C-+105°C

2.MATERIALS

- .HOUSING: High temperature plastic,UL94 V-0,Color of black.
- .SHELL: Copper alloy.
- .CONTACT: Copper alloy.

3.PRODUCT NUMBER CODE:


- DS1104-02 - X X X X X
- X Packing Type
  - R: Tape On Reel
  - B: Tube
  - T: Tray
  - X Mylar Support
  - S: W/ Mylar
  - X: W/O Mylar
  - X Contact plating
  - O: Selective gold flash
  - C: Selective 3u" gold
  - X Shell plating
  - 6: Full Matt Tin
  - N: Full Nickel
  - 8: Full Gold
  - X Color of housing
  - B: BLACK

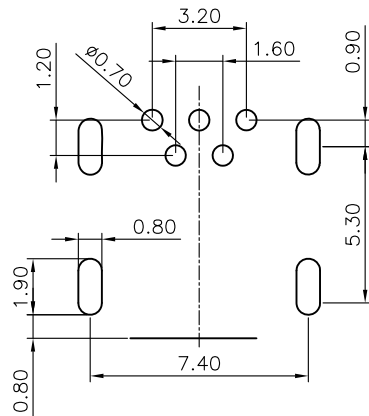

Recommend PCB Layout  
Tolerance=±0.03

Tel:86-574-63508787  
Fax:86-574-63510817  
E-mail:sale@zhenqin.com.cn  
Http://www.connfly.com

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°	mm	MINI USB 5 Positions
.X	±0.38	.X	±3°		FEMALE R/A TYPE
.XX	±0.25	.XX	±2°		
DRAWING TYPE		CUSTOMER		SHEET SIZE	SERIES
SCALE		1:1		A4	DS1104-02 SERIES
DRAWING NO.		C-DS1104-02-XXXXX		SHEET 1 OF 1	

 晨翔电子有限公司  
**CONNFLY CONNFLY ELECTRONIC CO. LTD**