


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 08/23/07'	~	

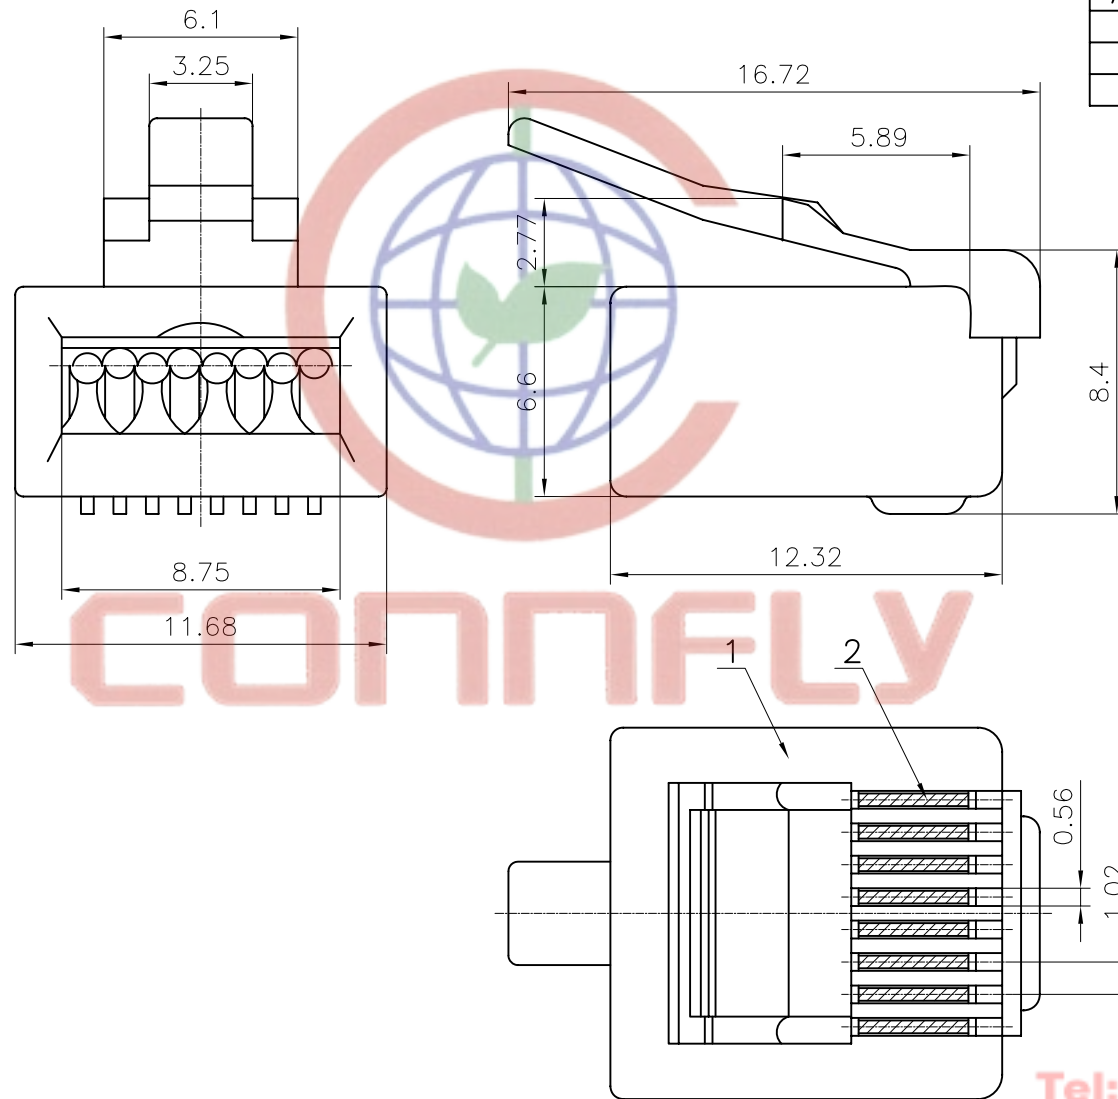

SPECIFICATION

1. Insulation Resistance:1000MΩ Min.
2. Withstand Voltage:500V AC/Minute.
3. Durability:600 Cycles Min.
4. Contact resistance:50mΩ max.
5. Product Number Code:

DS1123-07 - X X X X

Housing Color
T:Transparent

Contact Plating
0:Gold Flash 15:15u''Au
3:3u''Au 30:30u''Au
6:6u''Au

No.Of Contacts
8:8p8c

Connector Type
P:Plug

Series No.
DS1123-07

Tel: 86-574-63508787

Fax: 86-574-63510817

GENERAL TOLERANCE					ANGLE TOLERANCE		PROJECTION	UNITS	TITLE
(2)	BLADE	8	Copper alloy	GOLD PLATING	X. ±0.60	X. ±5'	mm	PLUG 8P8C SHORT COMBINE TYPE	
					.X ±0.38	.X ±3'			
					.XX ±0.25	.XX ±2'			
(1)	HOUSING	1	PC	UL94 V-0 OR 94 V-2	DRAWING TYPE CUSTOMER		A4	SERIES DS1123-07 SERIES	
No.	PART NAME	Q'TY	MATERIAL	REMARK	SCALE	1:1	SHEET	1 OF 1	
					DRAWING NO.	C-DS1123-07-XXXX			



晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD