
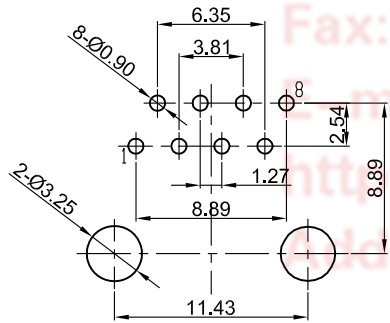


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 04/13/09'		LJC 04/13/09'
B	DRAWING UPDATE	JLZ 06/28/19'		

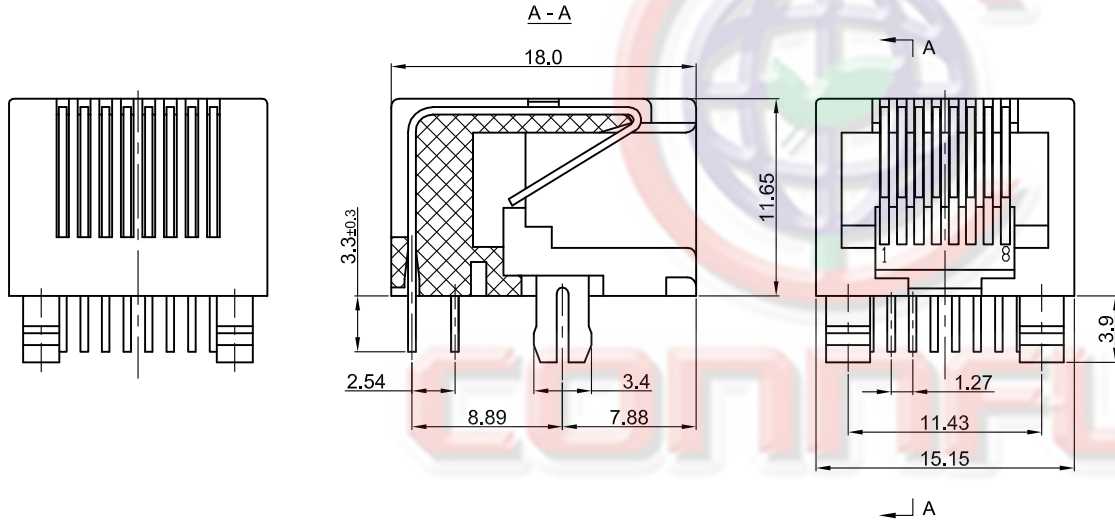

RECOMMEND PCB LAYOUT  
TOLERANCE=±0.05mm

Notes:

- Electrical Characteristics:
  - Contact Resistance: 20mΩ Max.
  - Dielectric Withstanding Voltage: 1000V AC(rms) For 1 Minute.
  - Insulation Resistance: 1000MΩ Min.
  - Current Rating: 1.5A.
  - Voltage Rating: 125V AC rms.
- Environment Characteristics:
  - Temperature: -40°C~+85°C.
- Materials:
  - Contact Material: Copper Alloy.
  - Contact Plating: Gold Plating Over Nickel.
  - Insulator Materials: PBT, UL94-V0.
- Product Number Code:

DS1134-05-X X X X X

- Ear Support  
X:W/O Ear
- Housing Color  
A:Gray B:Black
- Contact Plating  
0:Gold Flash  
3:3u" Gold  
(6;15;30)Micro Inch
- No.Of Contacts  
8:8P8C
- Connector Type  
S:Socket

Tel:86-574-63508787

Fax:86-574-63510817

E-mail:sale@connfly.com

http://www.connfly.com

Address: East Industry Zone KuangYan

Town Cixi Ningbo China

Phone: 86-574-6315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1134-05-XXXXX-B		

PROJECTION	TITLE
	PCB JACK 8p
UNITS	mm
SHEET SIZE	A4
SERIES	DS1134-05 SERIES

**晨翔电子有限公司**  
**CONNFLY CONNFLY ELECTRONIC CO. LTD**

1 2 3 4 5 6 7 8