



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LV 01/28/15'		

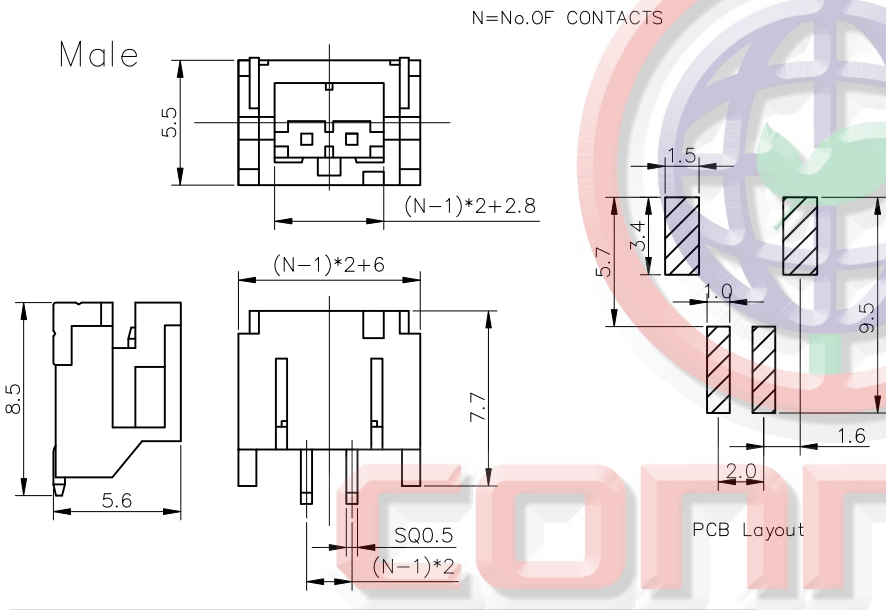

- NOTES:
- Materials:
 - 1.1 Housing material: LCP/NYLON 66
 - 1.2 Contact: Copper Alloy
 - 1.3 Wire Insulator: PVC
 - 1.4 Wire: Tin Plated Copper
 - Specifications:
 - 2.1 Current Rating: 2A
 - 2.2 Voltage Rating: 250V AC/DC
 - 2.3 Contact Resistance: 10mΩ Max.(Connector Only)
 - 2.4 Insulation resistance: 1000MΩ Min.(Connector Only)
 - 2.5 Dielectric Withstanding Voltage: 800V AC(rms) For 1 Minute.
 - 2.6 Temperature: -25°C~+85°C.
 - Product Number Code:
 - DS1137-14 - X X X X X X X

- PACKING TYPE
 - A: Polybag
 - R: Tape On Reel
 - T: Tray
- WIRE LENGTH(DIM L)(Female Only)
 - 115: 115mm
- HOUSING COLOR
 - W: White(Female Only)
 - V: Ivory(Male Only)
- CONTACT PLATING
 - 6: Full Tin
 - 8: Full Gold
- MOUNTING TYPE
 - C: Crimp(Female Only)
 - S: SMT(Male Only)
- CONNECTOR TYPE
 - F: Female
 - M: Male
- No.OF CONTACTS
 - 2-16

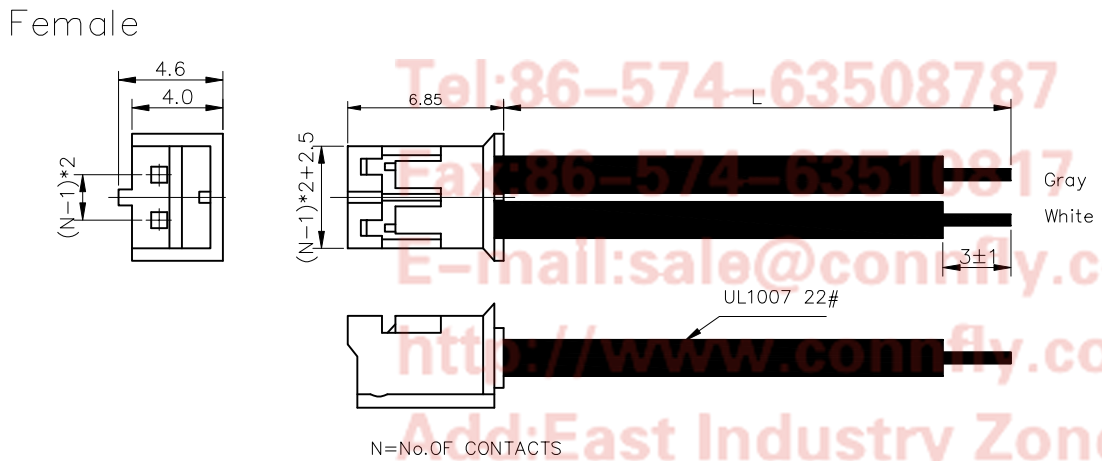

Tel:86-574-63508787
 Fax:86-574-63510917
 E-mail:sale@connfly.com
 http://www.connfly.com
 Add:East Industry Zone KuangYan
 Town Cixi Ningbo City
 P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	C-DS1137-14-XXXXXX-A

PROJECTION		TITLE	2.0mm LED SERIDS CRIMP & FEMALE SMT TYPE CONNECTOR
UNITS	mm	SHEET SIZE	A4
SHEET SIZE	A4	SERIES	DS1137-14 SERIES

晨翔电子有限公司
 CONNFLY CONNFLY ELECTRONIC CO., LTD