



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/23/17'		

NOTES:

1. Materials:
 - 1.1. Housing: PA66 Colour:White.
 - 1.2. Contact: Copper Alloy, Plating Tin.
 - 1.3. Tooth Slice:Steel, Plating Tin,
2. Specifications:
 - 2.1. Contact Resistance: 100mΩ maximum.
 - 2.2. Insulation Resistance: 1000MΩ minimum.
 - 2.3. Dielectric Withstanding Voltage: 1000V AC 1 minute.
 - 2.4. Current: 5A AC,DC.
 - 2.5. Voltage: 12~24V DC.
 - 2.6. Application wire range:AWG22.
 - 2.7. Application strip thickness:0.3mm.
 - 2.8. Temperature: -20°C~+60°C.
3. Product Number Code:

DS1137-33 - X X X X X X X X

- Strip Width(Dim W)
A: 10mm
B: 12mm
- Wire length(Dim L)
150: 150mm
.....
- Housing Color
W: White
- Pin plating
6: Full tin.
- Mounting type
D: IDC type
- Wire Gauge
22:UL2468 22AWG
- Connector type
F: Female
- No. of positions
4: 4p

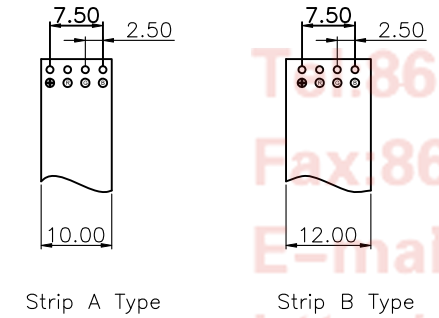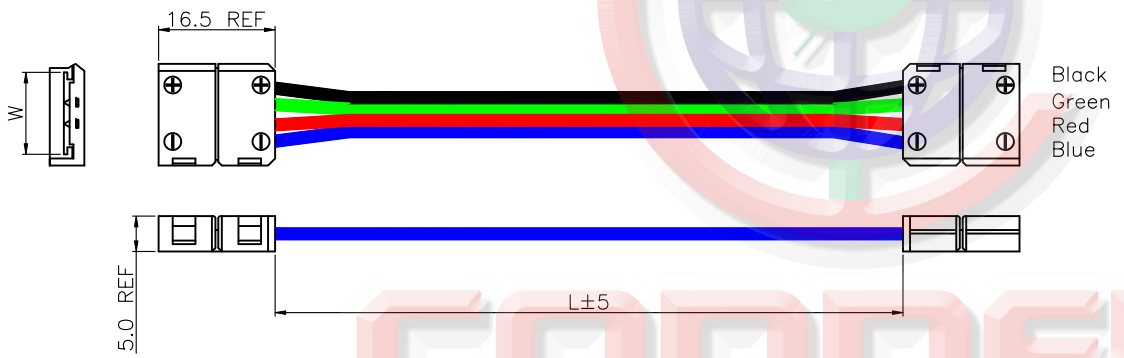

TEL: 86-574-63508787
 Fax: 86-574-63510817
 E-mail: sale@connfly.com
 http://www.connfly.com
 Add: East Industry Zone Kuang Yan
 Town Cixi Ningbo China
 P.C: 315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1137-33-XXXXXXX-A		

PROJECTION		TITLE	No-soldering 4Pin RGB LED
UNITS	mm	Bouble Connector Wired Cable	
SHEET SIZE	A4	SERIES	DS1137-33 SERIES

晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD