


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 12/04/06'		LJC 12/04/06'
B	DRAWING UPDATE	JLZ 04/26/20'		

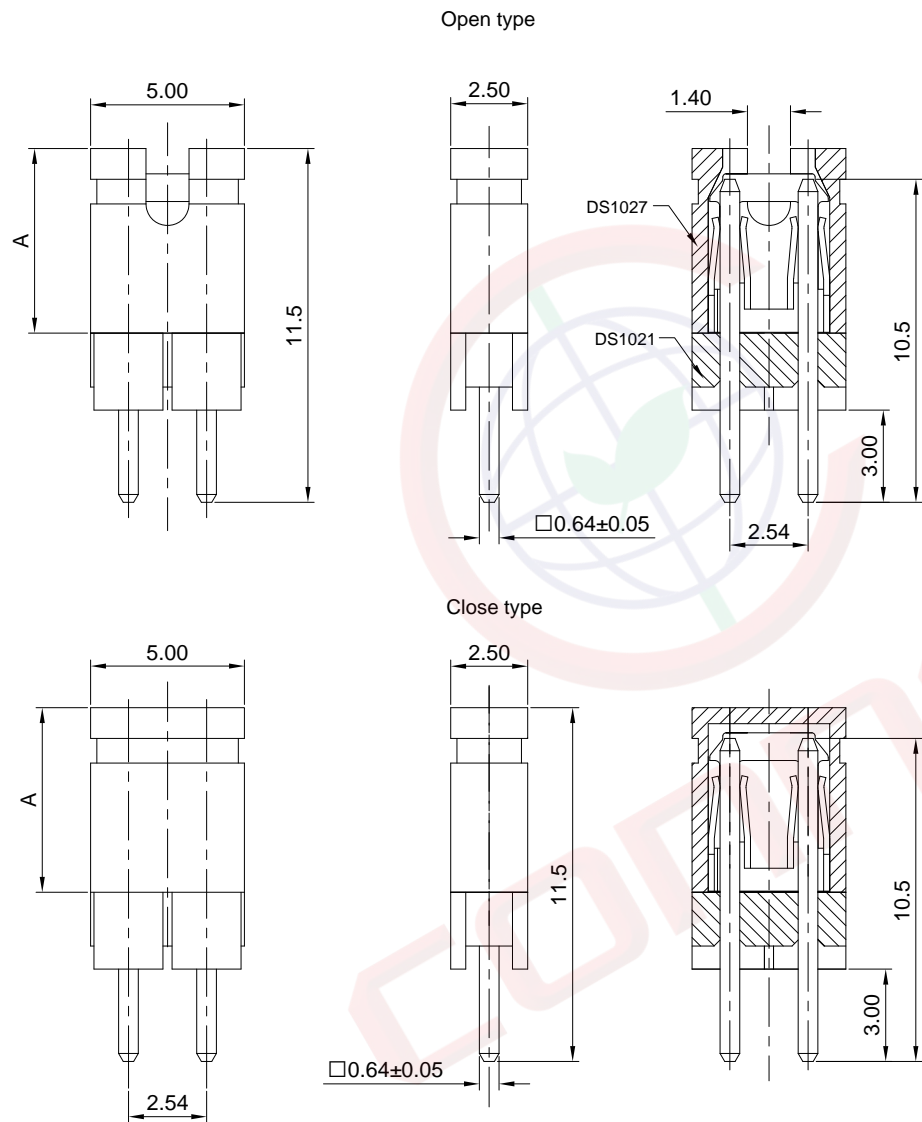

- Notes:
- Specifications:
- Contact Resistance: 20mΩ Max.
 - Insulation Resistance: 1000MΩ Min.
 - Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
 - Current Rating: 3A.
 - Temperature: -40°C~+105°C.
- Materials:
- Contact Material: Copper Alloy.
 - Insulator Material: Thermoplastic.
- Product Number Code:

DS1027-01 - X X X X X X

- Connector Q'ty:
1: 2 Connector
1PCS DS1021; 1PCS DS1027
- Profile height(DIM A):
0:6.0mm
- Contact plating:
8: Full gold flash
- Housing color:
B: Black
- Housing type:
A:Open B:Close
- No.of contacts:
2: 2pin

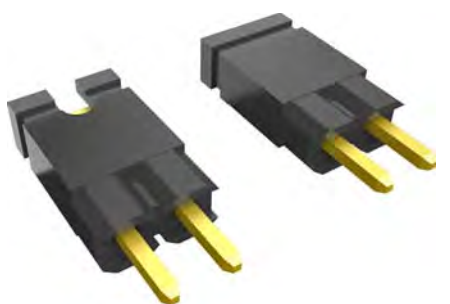

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	2.54mm Mini Jumper With Pin Header	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1027-01 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET	1 OF 1			
DRAWING NO.		C-DS1027-01-XXXXX-B					

晨翔电子有限公司
CONNFLY CONNELY ELECTRONIC CO. LTD